

## Sub-Surface Stormwater Storage System

### Product: Observation Ports



**StormTank™** is designed without any internal walls to allow full access. To complement this open structure, Brentwood offers three different size cleanout / observation ports for utilization with the system.


The ports are constructed of PVC and available in 6" (152 mm), 8" (203 mm) and 10" (254 mm) diameters. The 10" (254 mm) port allows access with a vacuum truck hose to facilitate easy debris removal.

### Technical Data


#### Nominal Specifications

| Model | Pipe Diameter OD    | Plate Dimensions                | Weight                |
|-------|---------------------|---------------------------------|-----------------------|
| OP-6  | 6.625"<br>(168 mm)  | 18"x18"x0.5"<br>(457x457x13 mm) | 10.5 lbs.<br>(4.8 kg) |
| OP-8  | 8.625"<br>(219 mm)  | 18"x18"x0.5"<br>(457x457x13 mm) | 12.5 lbs.<br>(5.7 kg) |
| VP-10 | 10.750"<br>(273 mm) | 18"x18"x0.5"<br>(457x457x13 mm) | 13.0 lbs.<br>(5.9 kg) |

- It is recommended that ports be located a maximum of 30' (3.048 m) on center to provide the necessary access to the system for inspection, flushing and cleanout.

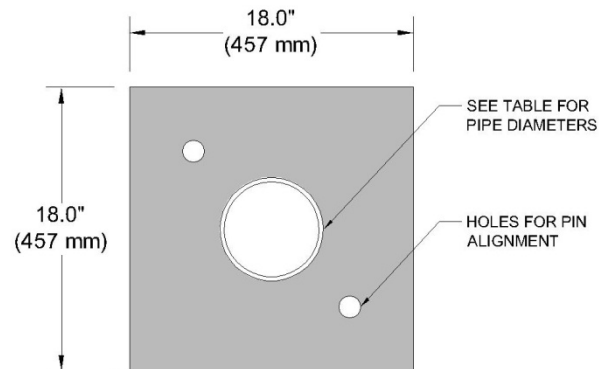

TOP VIEW

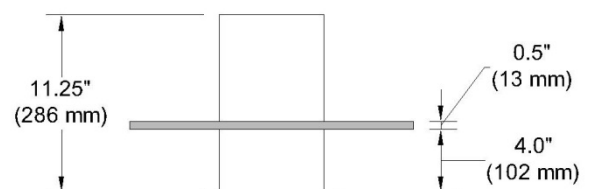

SIDE VIEW

### Manufacturer:



Distributed by:  
R. H. Moore & Associates, Inc.  
(O): 813-988-0200 (F): 813-985-4533  
info@rhmooreassociates.com  
www.rhmooreassociates.com

**Disclaimer:** Brentwood Industries (Brentwood) assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Brentwood Industries disclaims any and all other warranties, expressed or implied with respect to any service or deliverable other than those expressly provided in this (section, paragraph, quotation, proposal, etc.) including without limitation any implied warranty of merchantability or fitness for a particular purpose. This document should not be construed as engineering advice.