



The Shield

Brentwood's StormTank Shield provides a low-cost solution for stormwater pretreatment by reducing pollutant discharge through gross sediment removal and oil/water separation. Once the Shield is installed, any contaminants with a density less than water are prevented from exiting the inlet. This improves treatment efficiency by increasing the flow length and time of concentration vital to particle settling.



Anti-Siphon Vent

Vortices and siphoning are prevented by the built-in vent, which requires no additional parts or connections.




Access Port

The access port and slim profile simplify the cleaning process and ensure that nothing obstructs the discharge.



Hand Grip

The built-in hand grip makes the Shield easy to handle during the installation process.



Easy Installation

Pre-drilled mounting holes allow the Shield to be easily fastened over the outlet pipe. Conveniently available in 18-, 24-, and 30-inch sizes.



 **MADE IN THE USA**

Additional StormTank Products:



The Module

The Brentwood StormTank Module is a subsurface stormwater storage unit load-rated for use under surfaces such as parking lots, athletic fields, and parks.




The Pack

The StormTank Pack is the light-duty solution for subsurface stormwater management.

REMOVAL EFFICIENCY CURVES

STKS-18, 4'x2' Tank, 1/16" Particles @ 200 mg/L

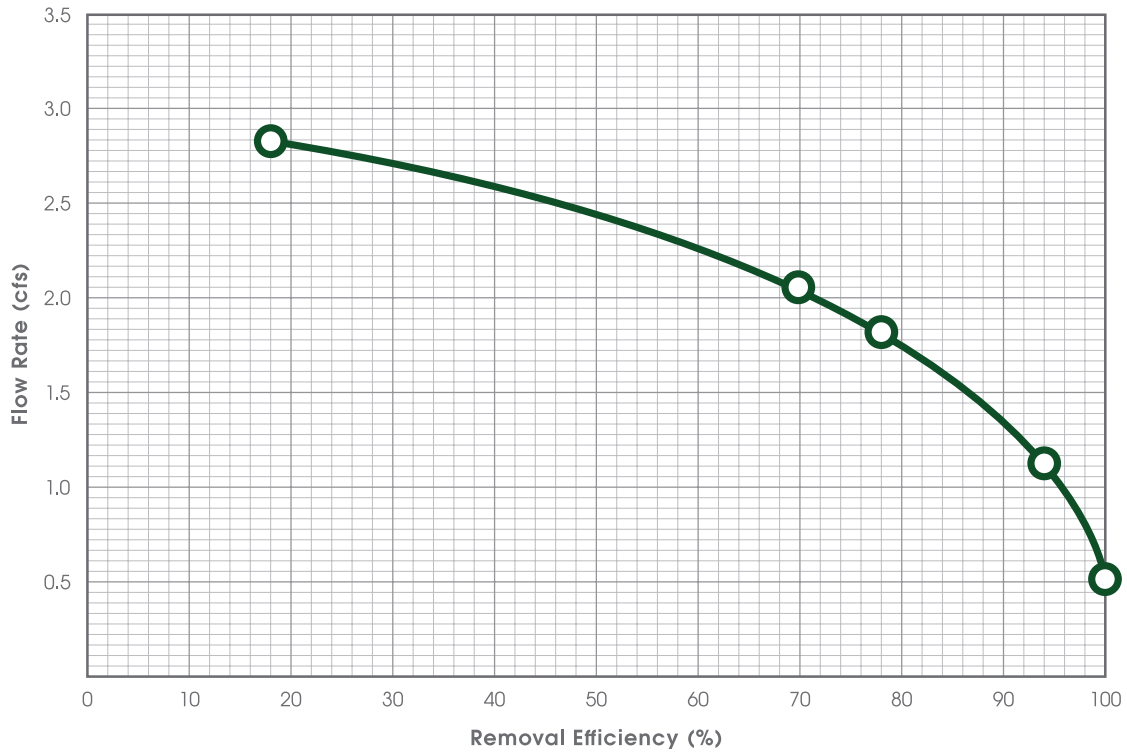

STKS-24, 4'x4' Tank, 1/16" Particles @ 200 mg/L

