

Product: Observation Port Kits



StormTank™ is designed without any internal walls to allow full access. To complement this open structure, Brentwood offers three different size cleanout / observation ports for utilization with the system.


To simplify the installation, Brentwood has developed Observation Port Kits. These kits include the necessary port, flexible coupling and surface box; with the riser pipe being contractor-supplied.

Technical Data

Nominal Specifications

Model	Brentwood Observation Port	Flexible Coupling Diameter	Access Box (Pencell Part #)
OPK-6	OP-6	6.597"	DT-2-1324PC
OPK-8	OP-8	8.635"	DT-2-1324PC
VPK-10	VP-10	10.631"	DT-2-1324PC

- It is recommended that ports be located a maximum of 30' (3.048 m) on center to provide the necessary access to the system for inspection, flushing and cleanout.

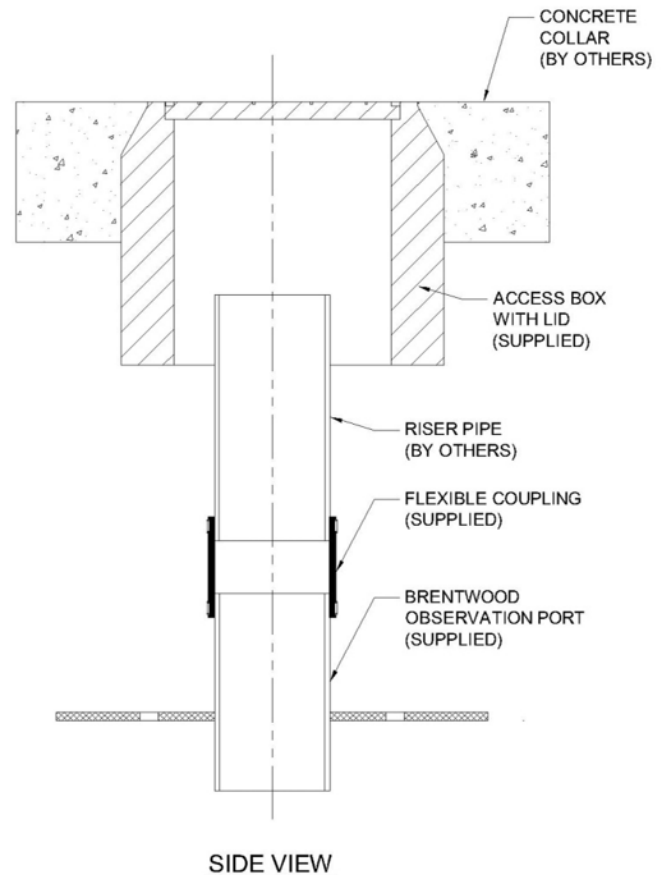

Manufacturer:



Distributed by:

R. H. Moore & Associates, Inc.
 (O): 813-988-0200 (F): 813-985-4533
 info@rhmooreassociates.com
 www.rhmooreassociates.com

Disclaimer: Brentwood Industries (Brentwood) assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Brentwood Industries disclaims any and all other warranties, expressed or implied with respect to any service or deliverable other than those expressly provided in this (section, paragraph, quotation, proposal, etc.) including without limitation any implied warranty of merchantability or fitness for a particular purpose. This document should not be construed as engineering advice.