

Introducing



Mud Mats

A NEW revolutionary product to keep you out of the mud!



CROSSING SENSITIVE AREAS



ALTERNATIVE TO ROCK ENTRANCES



RESIDENTIAL CONSTRUCTION ENTRANCE



SITE ACCESS


R. H. MOORE & ASSOCIATES, INC.

7834 Depot Lane, Tampa, FL 33637

Phone: (813) 988-0200 Fax: (813) 985-4533

Toll Free: (800) 330-2333 www.rhmooreassociates.com



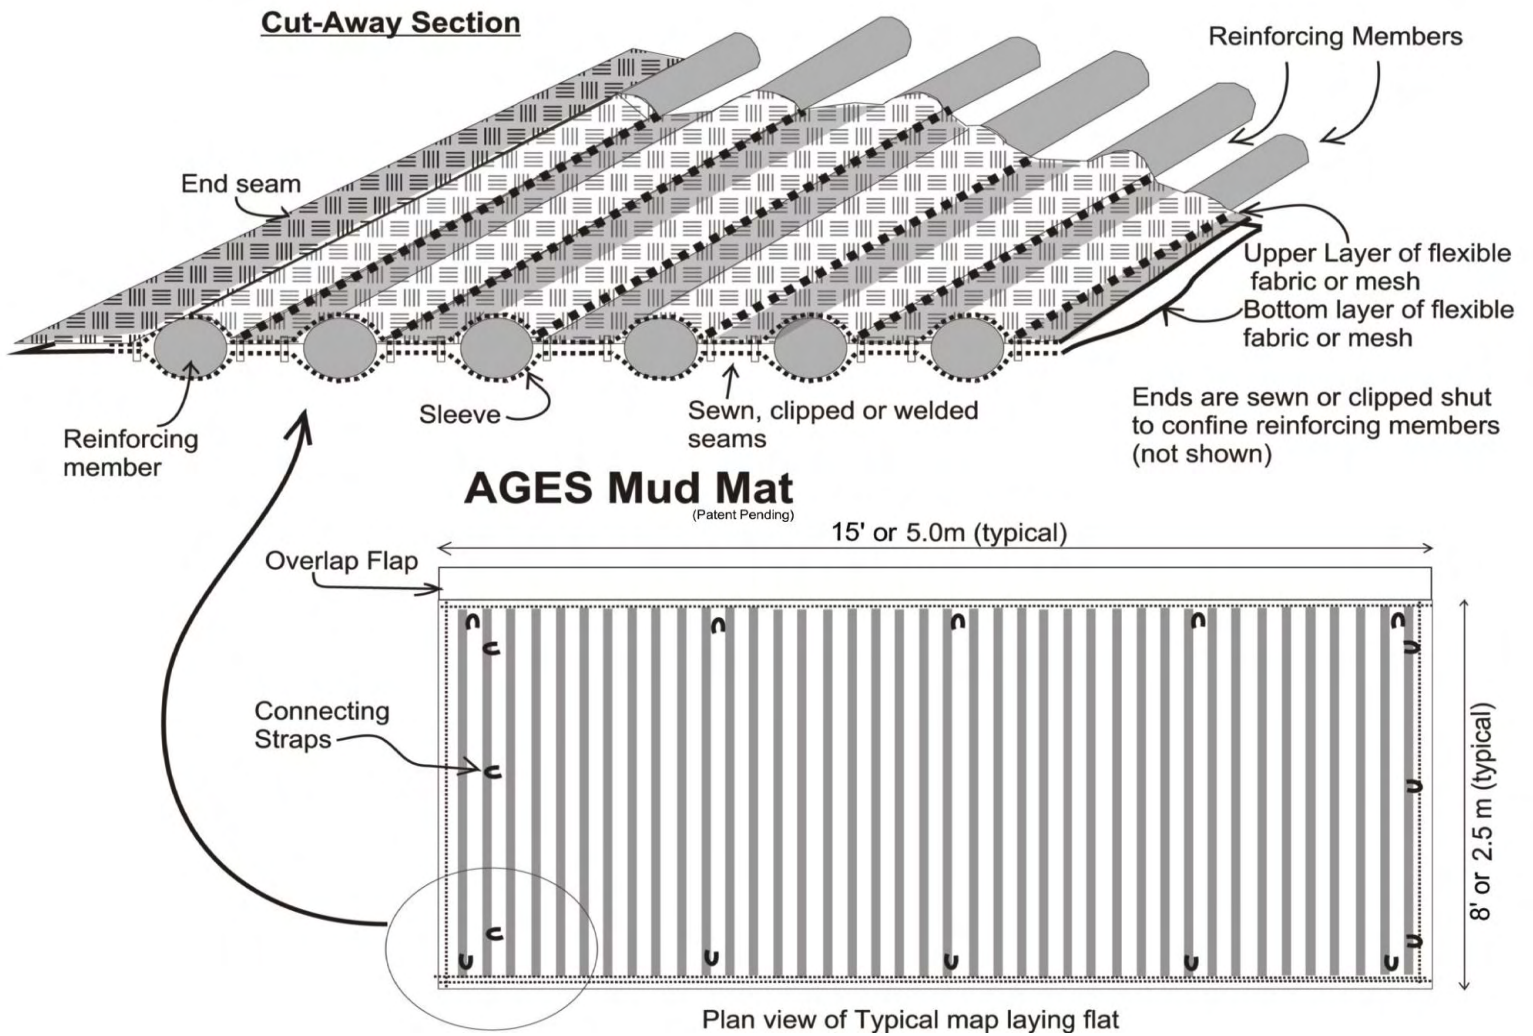

AGES Mud Mat Specifications

PROPERTY	TEST PROCEDURE	VALUE
Grab Tensile Strength	ASTM D4632	802.6 lbs.
Apparent Breaking Elongation	ASTM D4632	25% / 18%
Trapezoid Tearing Strength	ASTM D4533	607 lbs.
Puncture Resistance	ASTM D4833	374.3 lbs.
Mullen Burst	ASTM D3786	456.88 psi
Apparent Opening Size	ASTM D4751	70 US Sieve / 0.212mm
Constant Head Permittivity	ASTM D4491	20.16 g/m/ft ²
Wide Width Tensile	ASTM D4595	685.7 lbs./in.
Material	Woven Geotextile	100% Polypropylene

APPROXIMATE DIMENSIONS PER MAT	
Size Deployed (approx.)	15' x 8'
Shipping Size (rolled)	1.5' dia. x 8.5' long and
Weight	75 - 90 lbs

5 - carabineer clips for each mat (Side connection and end connection straps)

R. H. MOORE & ASSOCIATES, INC.

7834 Depot Lane, Tampa, FL 33637

Phone: (813) 988-0200 Fax: (813) 985-4533

Toll Free: (800) 330-2333 www.rhmooreassociates.com

