

## Mirafi® MPG<sup>4</sup> Composite Paving Grid

### OUR COMPANY

TenCate develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

### OUR PRODUCT

Mirafi® MPG<sup>4</sup> is a composite paving interlayer comprised of a lightweight polypropylene paving fabric reinforced with continuous filament fiberglass, mechanically fastened in the machine, cross and bias angle directions. This unique, patent pending paving interlayer is designed for highly distressed pavement conditions and in addition, the material will provide a moisture barrier against further moisture intrusion. The lightweight polypropylene fabric requires less asphalt tack, saving on installation costs without compromising performance.

### The Difference Mirafi® MPG<sup>4</sup> Paving Composite Makes:

- **Reinforcement:** Mirafi® MPG<sup>4</sup> adds pavement reinforcement by improving the fatigue resistance of the new overlay to traffic loads and delaying reflective cracking by utilizing the multi-directional design of the grid.
- **Moisture Barrier:** The lightweight polypropylene paving fabric and fiberglass reinforcement, when saturated with the asphalt tack coat,

form a moisture barrier, providing protection from moisture intrusion through the pavement into the roadway base structure, which helps maintain the load bearing capacity and prolong the life of the roadway.


- **Flexibility:** Mirafi® MPG<sup>4</sup> is available in full width (12.5') and half width roll sizes for design and application, offering flexibility in treating the affected pavement areas.
- **Material Design:** Mirafi® MPG<sup>4</sup> by its unique design is the first multi-directional composite paving grid offering reinforcement and moisture protection to distressed pavements in all directions.
- **Recyclability:** Mirafi® MPG<sup>4</sup> can be milled and recycled into hot mix asphalt and reused saving on disposal costs lessening construction costs.
- **Installation:** Mirafi® MPG<sup>4</sup> installs easily using standard paving fabric equipment.

### OUR APPLICATIONS

Mirafi® MPG<sup>4</sup> is specifically designed to be used in hot mix asphalt overlays over existing asphalt or concrete pavements, or in new construction applications.

Mirafi® MPG<sup>4</sup> paving composite is ideal for:

- Highways
- Urban Streets
- Airports

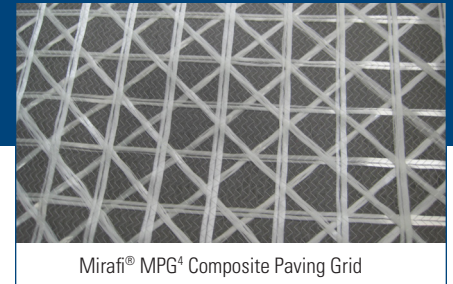

- Bridge Decks
- Parking Lots and Shopping Centers


It is recommended to use TenCate Geosynthetics Installation Guidelines when installing Mirafi® MPG<sup>4</sup>.

### OUR PROCESS

TenCate Mirafi® MPG<sup>4</sup> composite paving grid is manufactured using ISO 9001:2008 manufacturing guidelines and manufactured with the highest quality control standards in the industry. Our patent pending material design is the first composite paving material that offers reinforcement in all directions while inhibiting water penetration into the pavement structure. The mechanically fastened continuous fiberglass reinforcement offers tensile and added flexural pavement reinforcement while the lightweight paving fabric keeps moisture penetration in check.

### OUR SERVICE

TenCate offers complete application technical assistance. Our comprehensive service includes assistance during design, specification and throughout the process. TenCate makes the difference.

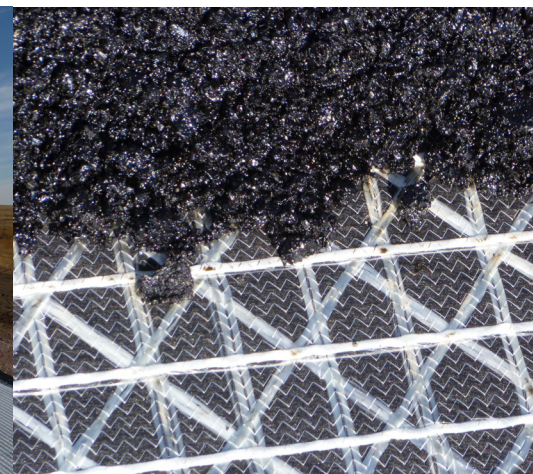

## Mirafi® MPG<sup>4</sup> Composite Paving Grid

### Technical Data

Mechanical Properties	Test Method	Unit	Average Roll Value
Tensile Strength @ 0°			459 (80)
Tensile Strength @ 90°	ASTM D6637	lbs/in	459 (80)
Tensile Strength @ 45°	Method A	(kN/m)	459 (80)
Tensile Strength @ -45°	Modified		459 (80)
Tensile Elongation		%	< 3
Mass/Unit Area	ASTM D5261	oz/yd <sup>2</sup> (g/m <sup>2</sup> )	16.6 (563)
Melting point	ASTM D276	F° (C°)	<b>Minimum Test Value</b> Glass filaments are incombustible and temperature resistant up to 752° (400°)
Asphalt Retention	ASTM D6140	gal/yd <sup>2</sup> (l/m <sup>2</sup> ) %	0.17 (0.8)
Glass by weight		%	85

Physical Properties	Unit	Roll Characteristics
Roll Dimensions (width x length)	ft (m)	6.25 x 300 (1.9 x 94.1)    12.5 x 150 (3.8 x 45.7)
Roll Area	yd <sup>2</sup> (m <sup>2</sup> )	208 (174)
Estimated Roll Weight	lbs (kg)	245 (111)

TenCate Geosynthetics Americas does not assume liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, statutory standards, warranties, guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation

© 2016 Nicolon Corporation. All Rights Reserved.

PDS.PGMG40916

365 South Holland Drive    Tel 800 685 9990    Fax 706 693 4400  
Pendergrass, GA 30567    Tel 706 693 2226    www.mirafi.com

